
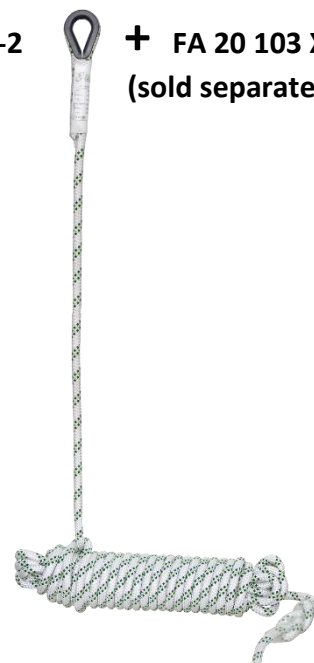




EN 353-2

+ FA 20 103 XX
(sold separately)

EN 353-2

MAXI 200 KG
(rescue only)

EN 12841

+



+

FA 70 011 99 (lg./m) / FA 70 000 98
(sold separately)

HS CODE

84798997

CARTON SIZE / PCS.

43 x 43 x 8 cm / 20

AET N°2777/10860-03/E02-01

Satra Technology Europe Ltd., N° 2777,
 Bracetown Business Park, Clonee,
 Dublin, D15YN2P, Ireland

MODULE D FI14/14003.01


SGS Fimko Oy, N°0598
 Takomotie 8,
 00380 HELSINKI, Finland

AET (UKCA) N°AB0321/16010-01/E01-01

Satra Technology Centre, N°0321
 Wyndham Way, Telford Way, Kettering
 Northamptonshire, NN16 8SD, United Kingdom


MODULE D 11 IN14/14003

SGS United Kingdom Ltd., N°0120
 Unit 202B, Worle Parkway,
 Weston-super-Mare, BS22 6WA, United Kingdom


REF.	FA 20 103 00A
LG.  KG	---
CE	EN 353-2:2002, EN 12841:2006
MAT.	
	YES
	
R(kN)	15 kN
+	(1) EN 353-2 : MAX. 200 KG (rescue only) (2) FA 20 103 10 / FA 20 103 15 / FA 20 103 20 / FA 20 103 30 / FA 20 103 40 / FA 20 103 50
	0.35 KG



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Matière connecteur
 Material of connector
Material conector
 Materiale connettore
Material des Verbinders



Coulisseau doté d'un point fixe
 Rope grab with a fixed point lock
Corredera provista de punto fijo
 Guida a punto fisso
Gleitelement mit Festpunkt

+

(1)

Point fort
 Key feature
Ventaja principal
 Punti forti
Produktvorteil

+

(2)

À utiliser avec
 To be used with
Para usar con
 Ad essere utilizzato con
Verwendet werden soll mit